E1065 80AMP VOLTAGE CONVERTER 12V – 24V




12V TO 24V VOLTAGE CONVERTER 80AMP
HIGH SPECIFICATION
MANUFACTURED IN THE UK

- **PART NO: E1065**
- **TYPE: SWITCH MODE STEP UP VOLTAGE CONVERTER**
- **RATING: 80 AMP**
- **MAX CONTINUOUS O/P CURRENT: 80 AMP**
- **PEAK OUTPUT CURRENT: 96 AMP**
- **INPUT VOLTAGE: 11 TO 15V DC**
- **OUTPUT VOLTAGE: 24V DC**
- **OVERLOAD PROTECTION: EXTERNAL FUSE**
- **OUTPUT PROTECTED: EXTERNAL FUSE**
- **POLARITY PROTECTED: YES**
- **OPERATING TEMPERATURE: - 40 DEG.C TO + 70 DEG.C**
- **HIGH TEMP PROTECTED: YES**
- **SHORT CIRCUIT PROTECTION: EXTERNAL FUSE**
- **EFFICIENCY: > 85%**
- **LOAD REGULATION: 0.3V**
- **DIMENSIONS: 380mm X 380mm X 90mm**
- **8 X E622 (10A) MOUNTED ON A SINGLE ALUMINIUM PLATE**

MODELS ALSO AVAILABLE: 10A / 20A / 30A / 40A / 60A / 50A / 70A / 90A / 100A

OEM AND TRADE ENQUIRIES WELCOME

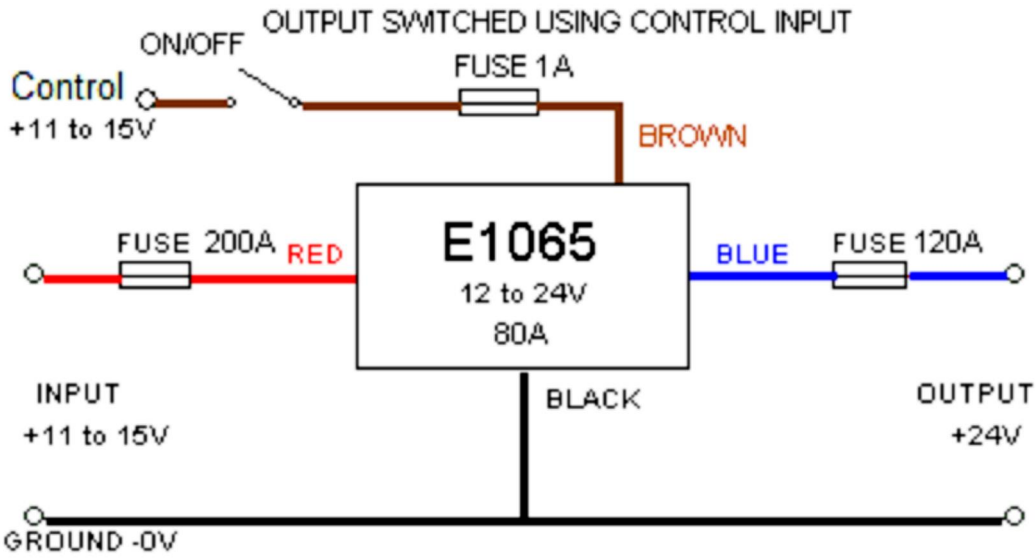

WARNING: SHORTING THE OUTPUT TO GROUND WHILST THERE IS POWER CONNECTED TO THE POWER INPUT WILL DAMAGE THE CONVERTER.

EURO MANUFACTURING AND MARKETING LIMITED
Euro Works, 11-13 High Street, Wem, Shropshire SY4 5AA, England.
Tel: +44 (0) 1939 235073 Fax: +44 (0) 1939 235074
Email: sales@eurogroup-gb.com OR sales@battery-management-voltage-converter.com
Web Site: www.eurogroup-gb.com OR www.battery-management-voltage-converter.com

BEFORE INSTALLATION YOU NEED TO PURCHASE:

RECOMMENDED MINIMUM CABLES SIZES:
INPUT (RED): 35mm² CONDUCTOR CROSS SECTION (451/0.3mm)
OUTPUT (BLUE): 35mm² CONDUCTOR CROSS SECTION (451/0.3mm)
GROUND (BLACK): 35mm² CONDUCTOR CROSS SECTION (451/0.3mm)
CONTROL (BROWN): 1.0mm² CONDUCTOR CROSS SECTION (32/0.2mm)

INSTALLATION INSTRUCTIONS:

1. **CONNECT THE BLUE OUTPUT LEAD CONNECTION TO THE +VE CONNECTION ON YOUR 24V EQUIPMENT**
2. **CONNECT THE BLACK LEAD CONNECTION TO GROUND, IE: THE VEHICLE CHASSIS (THIS IS COMMON TO THE INPUT AND OUTPUT AS SHOWN ON THE WIRING DIAGRAM)**
3. **CONNECT THE RED INPUT LEAD CONNECTION TO YOUR 12V +VE SUPPLY**
4. **THE BROWN CONTROL LEAD CONNECTION GIVES YOU THE OPTION TO SWITCH THE VOLTAGE CONVERTER ON AND OFF USING A STANDARD LOW CURRENT SWITCH.**
5. **ALTERNATIVELY YOU CAN CONNECT THE BROWN CONTROL LEAD CONNECTION DIRECTLY TO THE POSITIVE INPUT, IE: THE +VE CONNECTION ON THE 12V BATTERY WHICH WILL ENABLE YOU TO RUN THE VOLTAGE CONVERTER ALL THE TIME.**

IF IN DOUBT, PLEASE CONSULT AN AUTOMOTIVE ELECTRICIAN OR TELEPHONE US ON 01939 235073

WHY NOT VISIT OUR WEBSITES TO VIEW THE OTHER PRODUCTS WE MANUFACTURE:

http://www.battery-management-voltage-converter.com
This site covers our:

- **Battery Management Systems**
- **Split Charge Controllers**
- **DC-DC Battery Chargers**
- **DC-DC Voltage Converters**
- **Trailer Voltage Converters**
- **Battery Status Indicators**
- **Voltage Sensitive Switches.**

http://www.eurogroup-gb.com
This site covers our Range of:

- **Water Level Monitors**
- **Water Level Probes**
- **Temperature Monitors**
- **Temperature Probes**
- **Air Conditioning Fan Control Units**
- **Vehicle Flashers and Interrupters**
- **Light Control Units**
- **Oil Level Monitors**
- **Oil Level Probes**
- **Hydraulic Control Units**
- **Audible Warning Devices**
- **Reversing Alarms**
- **Timers**
- **Vehicle Safety and Security Units**
- **Digital Speed Switches**
- **Solenoid Controllers**
- **Relays, Connectors, Lamps, Switches**
- **Earth Straps**
- **Looms and Wiring Harnesses**
- **Transformer and Coil Winding**
- **Mechanical Assembly**
- **Special Purpose Electrical / Electronic Assembly**
- **Encapsulation and Formal Coating**
- **Vacuum Formed Parts**
- **Printed Circuit Board Assembly**

EURO MANUFACTURING AND MARKETING LIMITED
Euro Works, 11-13 High Street, Wem, Shropshire SY4 5AA, England.
Tel: +44 (0) 1939 235073 Fax: +44 (0) 1939 235074
Email: sales@eurogroup-gb.com OR sales@battery-management-voltage-converter.com
Web Site: www.eurogroup-gb.com OR www.battery-management-voltage-converter.com